



Taper Bush Shaft Lock Pulleys

"KIC" Range of Engineering Products



KHODIYAR INDUSTRIAL PVT. LTD.

Plot No. 40, Sardar Industrial area, Bh. Kothariya Solvent Oil Mill
Gondal Road, Rajkot - 360002, Gujarat, India
Phone : +91 96875 67045 Email : info@kic.co.in



● ADVANTAGES :

1. Unskilled labours can achieve shrink fit of bushes and pulleys on shafts.
2. Eliminates key ways costs and re-boring and also **eliminates keys fitments**.
3. **Cost** and **time** saving.
4. **Interchangeable** between many products.
5. Convenience in dismantling, **maintenance** and components replacements.



● HOW TO INSTALL :

1. Clean the mating tapered surfaces of bore in the pulley and out side the bosh of hub and should be free from oil and dirt.
2. Holes in the pulleys and bush should be line up.
3. Lubricate the point of grub screw and thread head of cap screw.
4. Place screws loosely in hole of threaded hub.
5. Clean shaft and fit bush to shaft, such that the bush will grip the shaft.
6. Using the wrench tighten screws gradually until they are fully secured.





● HOW TO REMOVE :

1. Remove all pusher screws, insert puller screw by lubricating thread in threaded hole in bush.
2. Tight the puller screw till the bush gets loosened.



RECOMMENDED MINIMUM PULLEY PITCH DIAMETERS

V/WEDGE BELT SECTION	A	B	C	SPZ	SPA	SPB	SPC
	80	125	200	56	90	160	224


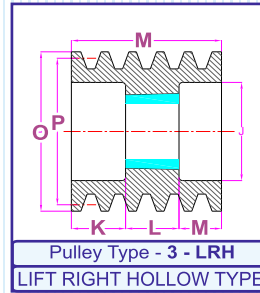
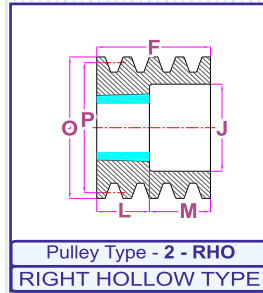



FOR USE WITH 'SPZ' SECTION BELTS

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0067 1 Z	67	1	1108	28	1 1/8"	1-RHU	16	-	-	22	6	60	72.5
0067 2 Z		2	1108	28	1 1/8"	6-LHO	28	38	6.0	22	-	-	
0067 3 Z		3	1108	28	1 1/8"	6-LHO	40	38	18.0	22	-	-	
0071 1 Z	71	1	1108?	28	1 1/8"	1-RHU	16	-	-	22	6.0	60	76.5
0071 2 Z		2	1108	28	1 1/8"	6-LHO	28	42	6.0	22	-	-	
0071 3 Z		3	1108	28	1 1/8"	6-LHO	40	42	18.0	22	-	-	
0075 1 Z	75	1	1108	28	1 1/8"	1-RHU	16	-	-	22	6.0	60	80.5
0075 2 Z		2	1210	32	1 1/4"	6-LHO	28	46	3.0	25	-	-	
0075 3 Z		3	1210	32	1 1/4"	6-LHO	40	46	15.0	25	-	-	
0080 1 Z	80	1	1210	32	1 1/4"	1-RHU	16	-	-	25	9.0	75	85.5
0080 2 Z		2	1210	32	1 1/4"	6-LHO	28	51	3.0	25	-	-	
0080 3 Z		3	1210	32	1 1/4"	6-LHO	40	51	15.0	25	-	-	
0080 4 Z		4	1210	32?	1 1/4"	6-LHO	52	51	27.0	25	-	-	
0085 1 Z	85	1	1210	32	1 1/4"	1-RHU	16	-	-	25	9.0	83	90.5
0085 2 Z		2	1610	42	1 1/8"	6-LHO	28	56	3.0	25	-	-	
0085 3 Z		3	1610	42	1 1/8"	6-LHO	40	56	15.0	25	-	-	
0085 4 Z		4	1610	42	1 1/8"	6-LHO	52	56	27.0	25	-	-	
0085 5 Z		5	1610	42	1 1/8"	6-LHO	64	56	39.0	25	-	-	
0090 1 Z	90	1	1210	32	1 1/4"	1-RHU	16	-	-	25	9.0	83	95.5
0090 2 Z		2	1610	42	1 1/8"	6-LHO	28	61	3.0	25	-	-	
0090 3 Z		3	1610	42	1 1/8"	6-LHO	40	61	15.0	25	-	-	
0090 4 Z		4	1610	42	1 1/8"	6-LHO	52	61	27.0	25	-	-	
0090 5 Z		5	1610	42	1 1/8"	6-LHO	64	61	39.0	25	-	-	
0090 6 Z		6	1610	42	1 1/8"	6-LHO	76	61	51.0	25	-	-	
0095 1 Z	95	1	1210	32	1 1/4"	1-RHU	16	-	-	25	9.0	83	100.5
0095 2 Z		2	1610	42	1 1/8"	6-LHO	28	66	3.0	25	-	-	
0095 3 Z		3	1610	42	1 1/8"	6-LHO	40	66	15.0	25	-	-	
0095 4 Z		4	1610	42	1 1/8"	6-LHO	52	66	27.0	25	-	-	
0095 5 Z		5	1610	42	1 1/8"	6-LHO	64	66	39.0	25	-	-	
0095 6 Z		6	1610	42	1 1/8"	6-LHO	76	66	51.0	25	-	-	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED





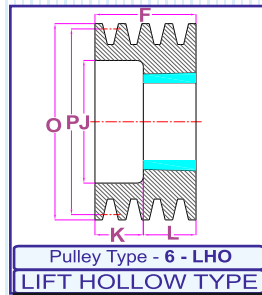



❖ **FOR USE WITH 'SPZ' SECTION BELTS** ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0100 1 Z	100	1	1210	32	1 1/4"	1-RHU	16	-	-	25	9	83	105.5
0100 2 Z		2	1610	42	1 5/8"	6-LHO	28	71	3.0	25	-	-	
0100 3 Z		3	1610	42	1 5/8"	6-LHO	40	71	15.0	25	-	-	
0100 4 Z		4	2012	50	2"	6-LHO	52	71	20.0	32	-	-	
0100 5 Z		5	2012	50	2"	6-LHO	64	71	32.0	32	-	-	
0100 6 Z		6	2012	50	2"	6-LHO	76	71	44.0	32	-	-	
0112 1 Z	112	1	1610	42	1 5/8"	1-RHU	16	-	-	25	9.0	92	117.5
0112 2 Z		2	1610	42	1 5/8"	6-LHO	28	83	3.0	25	-	-	
0112 3 Z		3	2012	50	2"	6-LHO	40	83	8.0	32	-	-	
0112 4 Z		4	2012	50	2"	6-LHO	52	83	20.0	32	-	-	
0112 5 Z		5	2012	50	2"	6-LHO	64	83	32.0	32	-	-	
0112 6 Z		6	2012	50	2"	6-LHO	76	83	44.0	32	-	-	
0125 1 Z	125	1	1610	42	1 5/8"	1-RHU	16	-	-	25	9.0	92	130.5
0125 2 Z		2	1610	42	1 5/8"	6-LHO	28	96	3.0	25	-	-	
0125 3 Z		3	2012	50	2"	6-LHO	40	96	8.0	32	-	-	
0125 4 Z		4	2012	50	2"	6-LHO	52	96	20.0	32	-	-	
0125 5 Z		5	2517	60	2 1/2"	6-LHO	64	96	19.0	45	-	-	
0125 6 Z		6	2517	60	2 1/2"	6-LHO	76	96	-	45	-	-	
0140 1 Z	140	1	1610	42	1 5/8"	1-RHU	16	-	3	25	9.0	92	145.5
0140 2 Z		2	1610	42	1 5/8"	6-LHO	28	111	-	25	-	-	
0140 3 Z		3	2012	50	2"	2-RHO	40	111	-	32	8.0	-	
0140 4 Z		4	2012	50	2"	2-RHO	52	111	-	32	20.0	-	
0140 5 Z		5	2517	60	2 1/2"	2-RHO	64	111	-	45	19.0	-	
0140 6 Z		6	2517	60	2 1/2"	2-RHO	76	111	-	45	31.0	-	
0160 1 Z	160	1	1610	42	1 5/8"	1-RHU	16	-	-	25	9.0	92	165.5
0160 2 Z		2	2012	50	2"	1-RHU	28	131	-	32	4.0	112	
0160 3 Z		3	2012	50	2"	2-RHO	40	131	-	32	8.0	-	
0160 4 Z		4	2517	60	2 1/2"	2-RHO	52	131	-	45	7.0	-	
0160 5 Z		5	2517	60	2 1/2"	2-RHO	64	131	-	45	19.0	-	
0160 6 Z		6	2517	60	2 1/2"	2-RHO	76	131	-	45	31.0	-	
0180 1 Z	180	1	1610	42	1 5/8"	1-RHU	16	-	-	25	9.0	92	185.5
0180 2 Z		2	2012	50	2"	1-RHU	28	-	-	32	4.0	112	
0180 3 Z		3	2012	50	2"	2-RHO	40	151	-	32	8.0	-	
0180 4 Z		4	2517	60	2 1/2"	2-RHO	52	151	-	45	7.0	-	
0180 5 Z		5	2517	60	2 1/2"	2-RHO	64	151	-	45	19.0	-	
0180 6 Z		6	2517	60	2 1/2"	2-RHO	76	151	-	45	31.0	-	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED





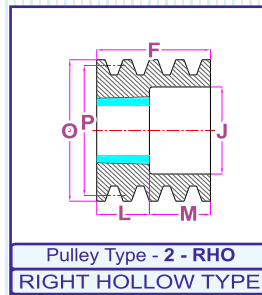



❖ **FOR USE WITH 'SPZ' SECTION BELTS** ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0200 1 Z	200	1	2012	50	2"	1-RHU	16	-	-	32.0	16.0	112	205.5
0200 2 Z		2	2012	50	2"	1-RHU	28	171	-	32.0	4.0	124	
0200 3 Z		3	2012	50	2"	2-RHO	40	171	-	32.0	8.0	124	
0200 4 Z		4	2517	60	2 1/2"	3-LRH	52	171	4.5	45.0	4.5	-	
0200 5 Z		5	2517	60	2 1/2"	7-PCSH	64	171	9.5	45.0	9.5	124	
0200 6 Z		6	2517	60	2 1/2"	7-PSCH	76	171	15.5	45.0	15.5	124	
0250 1 Z	250	1	2012	50	2"	4-ACLH	16	221	8.0	32.0	8.0	112	255.5
0250 2 Z		2	2012	50	2"	4-ACLH	28	221	2.0	32.0	2.0	112	
0250 3 Z		3	2012	50	2"	5-ACSH	40	221	4.0	32.0	4.0	112	
0250 4 Z		4	2517	60	2 1/2"	7-PCSH	52	221	4.5	45.0	4.5	124	
0250 5 Z		5	2517	60	2 1/2"	5-ACSH	64	221	9.5	45.0	9.5	124	
0250 6 Z		6	2517	60	2 1/2"	5-ACSH	76	221	15.5	45.0	15.5	124	
0315 1 Z	315	1	2012	50	2"	4-ACLH	16	286	8.0	32.0	8.0	112	320.5
0315 2 Z		2	2012	50	2"	4-ACLH	28	286	2.0	32.0	2.0	112	
0315 3 Z		3	2517	60	2 1/2"	8-PCLH	40	286	2.5	45.0	2.5	124	
0315 4 Z		4	2517	60	2 1/2"	5-ACSH	52	286	4.5	45.0	4.5	124	
0315 5 Z		5	2517	60	2 1/2"	5-ACSH	64	286	9.5	45.0	9.5	124	
0315 6 Z		6	2517	60	2 1/2"	5-ACSH	76	286	15.5	45.0	15.5	124	
0400 1 Z	400	1	2012	50	2"	4-ACLH	16	371	8.0	32.0	8.0	112	405.5
0400 2 Z		2	2517	60	2 1/2"	4-ACLH	28	371	8.5	45.0	8.5	124	
0400 3 Z		3	2517	60	2 1/2"	4-ACLH	40	371	2.5	45.0	2.5	124	
0400 4 Z		4	2517	60	2 1/2"	5-ACSH	52	371	4.5	45.0	4.5	124	
0400 5 Z		5	3020	75	3"	5-ACSH	64	371	6.5	51.0	6.5	159	
0400 6 Z		6	3030	75	3"	4-ACLH	76	371	-	76.0	-	159	
0500 2 Z	500	2	2517	60	2 1/2"	4-ACLH	28	471	8.5	45.0	8.5	124	505.5
0500 3 Z		3	2517	60	2 1/2"	4-ACLH	40	471	2.5	45.0	2.5	124	
0500 4 Z		4	3020	75	3"	5-ACSH	52	471	0.5	51.0	0.5	159	
0500 5 Z		5	3020	75	3"	5-ACSH	64	471	6.5	51.0	6.5	159	
0500 6 Z		6	3030	75	3"	4-ACLH	76	471	-	76.0	-	159	
0630 3 Z		630	3	2517	60	2 1/2"	4-ACLH	40	601	2.5	45.0	2.5	
0630 4 Z	4		3020	75	3"	5-ACSH	52	601	0.5	51.0	0.5	159	
0630 5 Z	5		3030	75	3"	4-ACLH	64	601	6.0	76.0	6.0	159	
0630 6 Z	6		3535	90	3 1/2"	4-ACLH	76	601	6.5	89.0	6.5	178	
0800 3 Z	800	3	3030	75	3"	4-ACLH	40	771	18.0	76.0	18.0	159	805.5
0800 4 Z		4	3030	75	3"	4-ACLH	52	771	12.0	76.0	12.0	159	
0800 5 Z		5	3535	90	3 1/2"	4-ACLH	64	771	12.5	89.0	12.5	178	
0800 6 Z		6	3535	90	3 1/2"	4-ACLH	76	771	6.5	89.0	6.5	178	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED





❖ **FOR USE WITH 'A' & 'SPA' SECTION BELTS** ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								





FOR USE WITH 'A' SECTION BELTS

0080 1 A	80	1	1108	28	1 1/8'	1-RHU	20	-	-	22	-	60	85.5
0080 2 A		2	1108	28	1 1/8'	6-LHO	35	50	13	22	-	-	
0080 3 A		3	1210	32	1 1/4'	6-LHO	50	50	25	25	-	-	
0080 4 A		4	1215	32	1 1/4'	6-LHO	65	50	27	38	-	-	
0080 5 A		5	1215	32	1 1/4'	6-LHO	80	50	42	38	-	-	
0085 1 A	85	1	1108	28	1 1/8'	1-RHU	20	-	-	22	-	60	90.5
0085 2 A		2	1108	28	1 1/8'	6-LHO	35	55	13	22	-	-	
0085 3 A		3	1210	32	1 1/4'	6-LHO	50	55	25	25	-	-	
0085 4 A		4	1215	32	1 1/4'	6-LHO	65	55	27	38	-	-	
0085 5 A		5	1215	32	1 1/4'	6-LHO	80	55	42	38	-	-	
0090 1 A	90	1	1108	28	1 5/8'	1-RHU	20	-	-	22	-	60	95.5
0090 2 A		2	1108	28	1 5/8'	6-LHO	35	60	13.0	22	-	-	
0090 3 A		3	1610	42	1 5/8'	6-LHO	50	60	25.0	25	-	-	
0090 4 A		4	1615	42	1 5/8'	3-LRH	65	60	14.5	38	14.5	-	
0090 5 A		5	1615	42	1 5/8'	3-LRH	80	60	21.0	38	21.0	-	

FOR USE WITH 'A'/'SPA' SECTION BELTS

0095 1 A	95	1	1210	32	1 1/4'	1-RHU	20	-	-	25	-	83	100.5
0095 2 A		2	1610	42	1 5/8'	6-LHO	35	65	10.0	25	-	-	
0095 3 A		3	1610	42	1 5/8'	6-LHO	50	65	25.0	25	-	-	
0095 4 A		4	1615	42	1 5/8'	3-LRH	65	65	14.5	38	14.5	-	
0095 5 A		5	1615	42	1 5/8'	3-LRH	80	65	21.0	38	21.0	-	
0100 1 A	100	1	1610	42	1 5/8'	1-RHU	20	-	-	25	-	92	105.5
0100 2 A		2	1610	42	1 5/8'	6-LHO	35	65	10.0	25	-	-	
0100 3 A		3	1610	42	1 5/8'	6-LHO	50	65	25.0	25	-	-	
0100 4 A		4	1615	42	1 5/8'	6-LHO	65	65	27.0	38	-	-	
0100 5 A		5	1615	42	1 5/8'	6-LHO	80	65	42.0	38	-	-	
0100 6 A		6	1615	42	1 5/8'	3-LRH	95	65	28.5	38	28.5	-	
0106 1 A	106	1	1610	42	1 5/8'	1-RHU	20	-	-	25	-	92	111.5
0106 2 A		2	1610	42	1 5/8'	6-LHO	35	71	10.0	25	-	-	
0106 3 A		3	1610	42	1 5/8'	6-LHO	50	71	25.0	25	-	-	
0106 4 A		4	1615	42	1 5/8'	6-LHO	65	71	27.0	38	-	-	
0106 5 A		5	2012	50	2"	6-LHO	80	71	48.0	32	-	-	
0106 6 A		6	2012	50	2"	3-LRH	95	71	31.5	32	31.5	-	
0112 1 A	112	1	1610	42	1 5/8'	1-RHU	20	-	-	25	-	92	117.5
0112 2 A		2	1610	42	1 5/8'	6-LHO	35	77	10.0	25	-	-	
0112 3 A		3	2012	50	2"	6-LHO	50	77	18.0	32	-	-	
0112 4 A		4	2012	50	2"	6-LHO	65	77	33.0	32	-	-	
0112 5 A		5	2012	50	2"	6-LHO	80	77	48.0	32	-	-	
0112 6 A		6	2012	50	2"	6-LHO	95	77	31.5	32	31.5	-	





DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED



❖ FOR USE WITH 'A' & 'SPA' SECTION BELTS ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0118 1 A	118	1	1610	42	1 5/8'	1-RHU	20	-	-	25	5.0	92	124.5
0118 2 A		2	1610	42	1 5/8'	6-LHO	35	84	10.0	25	-	-	
0118 3 A		3	2012	50	2"	6-LHO	50	84	18.0	32	-	-	
0118 4 A		4	2012	50	2"	6-LHO	65	84	33.0	32	-	-	
0118 5 A		5	2012	50	2"	6-LHO	80	84	48.0	32	-	-	
0118 6 A		6	2012	50	2"	6-LHO	95	84	25.0	32	-	-	
0125 1 A	125	1	1610	42	1 5/8'	1-RUH	20	-	-	20	5.0	92	130.5
0125 2 A		2	1610	42	1 5/8'	2-RHO	35	90	-	25	10.0	-	
0125 3 A		3	2012	50	2"	2-RHO	50	90	-	32	18.0	-	
0125 4 A		4	2012	50	2"	2-RHO	65	90	-	32	33.0	-	
0125 5 A		5	2012	50	2"	2-RHO	80	90	-	32	48.0	-	
0125 6 A		6	2012	50	2"	3-LRH	95	90	31.5	32	31.5	-	
0132 1 A	132	1	1610	42	1 5/8'	1-RHU	20	-	-	25	5.0	92	137.5
0132 2 A		2	1610	42	1 5/8'	2-RHO	35	98	-	25	10.0	-	
0132 3 A		3	2012	50	2"	2-RHO	50	98	-	32	18.0	-	
0132 4 A		4	2517	60	2 1/2'	2-RHO	65	98	-	45	20.0	-	
0132 5 A		5	2517	60	2 1/2'	2-RHO	80	98	-	45	35.0	-	
0132 6 A		6	2517	60	2 1/2'	3-LRH	95	98	25.0	45	25.0	-	
0140 1 A	140	1	1610	42	1 5/8'	1-RUH	20	-	-	25	5.0	92	145.5
0140 2 A		2	2012	50	2"	6-LHO	35	105	3	32	-	-	
0140 3 A		3	2517	60	2 1/2'	2-RHO	50	105	-	45	5.0	-	
0140 4 A		4	2517	60	2 1/2'	2-RHO	65	105	-	45	20.0	-	
0140 5 A		5	2517	60	2 1/2'	2-RHO	80	105	-	45	35.0	-	
0140 6 A		6	2517	60	2 1/2'	3-LRH	95	105	25.0	45	25.0	-	
0150 1 A	150	1	1610	42	1 5/8'	1-RHU	20	-	-	25	5.0	92	155.5
0150 2 A		2	2012	50	2"	6-LHO	35	115	3.0	32	-	-	
0150 3 A		3	2517	60	2 1/2"	2-RHO	50	115	-	45	5.0	-	
0150 4 A		4	2517	60	2 1/2"	2-RHO	65	115	-	45	20.0	-	
0150 5 A		5	2517	60	2 1/2"	2-RHO	80	115	-	45	35.0	-	
0150 6 A		6	2517	60	2 1/2"	3-LRH	95	115	25.0	45	25.0	-	
0160 1 A	160	1	1610	42	1 5/8'	1-RUH	20	-	-	25	5.0	92	165.5
0160 2 A		2	2012	50	2"	6-LHO	35	125	3.0	32	-	-	
0160 3 A		3	2517	60	2 1/2"	2-RHO	50	125	-	45	5.0	-	
0160 4 A		4	2517	60	2 1/2"	2-RHO	65	125	-	45	20.0	-	
0160 5 A		5	2517	60	2 1/2"	2-RHO	80	125	-	45	35.0	-	
0160 6 A		6	2517	60	2 1/2"	3-LRH	95	125	25.0	45	25.0	-	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED



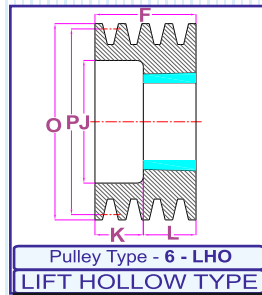



❖ **FOR USE WITH 'A' & 'SPA' SECTION BELTS** ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0170 1 A	170	1	1610	42	1 5/8'	1-RHU	20	-	-	25	5.0	92	175.5
0170 2 A		2	2012	50	2"	6-LHO	35	135	3.0	32	-	-	
0170 3 A		3	2517	60	2 1/2'	2-RHO	50	135	-	45	5.0	-	
0170 4 A		4	2517	60	2 1/2'	2-RHO	65	135	-	45	20.0	-	
0170 5 A		5	2517	60	2 1/2'	2-RHO	80	135	-	45	35.0	-	
0170 6 A		6	2517	60	2 1/2'	3-LRH	95	135	25.0	45	25.0	-	
0180 1 A	180	1	1610	42	1 5/8'	1-RHU	20	-	-	25	5.0	92	205.5
0180 2 A		2	2012	50	2"	2-RHO	35	145	-	32	3.0	-	
0180 3 A		3	2517	60	2 1/2'	2-RHO	50	145	-	45	5.0	-	
0180 4 A		4	2517	60	2 1/2'	2-RHO	65	145	-	45	20.0	-	
0180 5 A		5	3020	75	3"	2-RHO	80	145	-	51	29.0	-	
0180 6 A		6	3020	75	3"	3-LRH	95	145	22.0	51	22.0	-	
0190 1 A	190	1	2012	50	2"	1-RHU	20	-	-	32	12.0	112	195.5
0190 2 A		2	2012	50	2"	2-RHO	35	145	-	32	3.0	-	
0190 3 A		3	2517	60	2 1/2'	2-RHO	50	145	-	45	5.0	-	
0190 4 A		4	3020	75	3"	2-RHO	65	145	-	51	14.0	-	
0190 5 A		5	3020	75	3"	2-RHO	80	145	-	51	29.0	-	
0190 6 A		6	3020	75	3"	3-LRH	95	145	22.0	51	22.0	-	
0200 1 A	200	1	2012	50	2"	1-RHU	20	-	-	32	12.0	112	205.5
0200 2 A		2	2517	60	2 1/2'	8-PCLH	35	165	5.0	45	5.0	124	
0200 3 A		3	2517	60	2 1/2'	3-LRH	50	165	2.5	45	2.5	-	
0200 4 A		4	3020	75	3"	2-RHO	65	165	-	51	14.0	-	
0200 5 A		5	3020	75	3"	2-RHO	80	165	-	51	29.0	-	
0200 6 A		6	3020	75	3"	3-LRH	95	165	22.0	51	22.0	-	
0212 1 A	212	1	2012	50	2"	1-RHU	20	-	-	32	12.0	112	217.5
0212 2 A		2	2517	60	2 1/2'	8-PCLH	35	177	5.0	45	5.0	124	
0212 3 A		3	2517	60	2 1/2'	3-LRH	50	177	2.5	45	2.5	-	
0212 4 A		4	3020	75	3"	2-RHO	65	177	-	51	14.0	-	
0212 5 A		5	3020	75	3"	2-RHO	80	177	-	51	29.0	-	
0212 6 A		6	3020	75	3"	3-LRH	95	177	22.0	51	22.0	-	
0224 1 A	224	1	2012	50	2"	1-RHU	20	-	-	32	12.0	112	229.5
0224 2 A		2	2517	60	2 1/2'	8-PCLH	35	189	5.0	45	5.0	124	
0224 3 A		3	2517	60	2 1/2'	3-LRH	50	189	2.5	45	2.5	-	
0224 4 A		4	3020	75	3"	2-RHO	65	189	-	51	14.0	-	
0224 5 A		5	3020	75	3"	2-RHO	80	189	-	51	29.0	-	
0224 6 A		6	3020	75	3"	3-LRH	95	189	22.0	51	22.0	-	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED





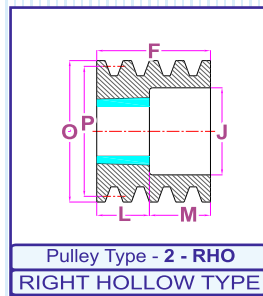



❖ FOR USE WITH 'A' & 'SPA' SECTION BELTS ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0236 1 A	236	1	2012	50	2"	1-RHU	20	201	-	32	12.0	112	241.5
0236 2 A		2	2517	60	2 1/2'	8-PCLH	35	201	5.0	45	5.0	124	
0236 3 A		3	2517	60	2 1/2'	2-RHO	50	201	-	45	-	-	
0236 4 A		4	3020	75	3"	2-RHO	65	201	-	45	-	-	
0236 5 A		5	3020	75	3"	2-RHO	80	201	-	51	-	-	
0236 6 A		6	3020	75	3"	3-LRH	95	201	22.0	51	22.0	-	
0250 1 A	250	1	2012	50	2"	1-RHU	20	215	-	32	12.0	112	255.5
0250 2 A		2	2517	60	2 1/2'	8-PCLH	35	215	2.5	45	2.5	124	
0250 3 A		3	2517	60	2 1/2'	7-PCSH	50	215	2.5	45	2.5	124	
0250 4 A		4	3020	75	3"	7-PCSH	65	215	7.0	51	7.0	159	
0250 5 A		5	3020	75	3"	7-PCSH	80	215	14.5	51	14.5	159	
0250 6 A		6	3020	75	3"	7-PCSH	95	215	22.0	51	22.0	159	
0265 1 A	265	1	2012	50	2"	1-RHU	20	215	-	32	12.0	112	270.5
0265 2 A		2	2517	60	2 1/2'	8-PCLH	35	215	2.5	45	2.5	124	
0265 3 A		3	2517	60	2 1/2'	7-PCSH	50	215	2.5	45	2.5	124	
0265 4 A		4	3020	75	3"	7-PCSH	65	215	7.0	51	7.0	159	
0265 5 A		5	3020	75	3"	7-PCSH	80	215	14.5	51	14.5	159	
0265 6 A		6	3020	75	3"	7-PCSH	95	215	22.0	51	22.0	159	
0280 1 A	280	1	2012	50	2"	1-RHU	20	245	-	32	12.0	112	285.5
0280 2 A		2	2517	60	2 1/2'	8-PCLH	35	245	2.5	45	2.5	124	
0280 3 A		3	2517	60	2 1/2'	7-PCSH	50	245	2.5	45	2.5	124	
0280 4 A		4	3020	75	3"	7-PCSH	65	245	7.0	51	7.0	159	
0280 5 A		5	3535	90	3 1/2"	7-PCSH	80	245	5.0	89	5.0	159	
0280 6 A		6	3535	90	3 1/2"	7-PCSH	95	245	3.0	89	3.0	159	
0300 1 A	300	1	2012	50	2"	1-RHU	20	265	-	32	12.0	112	305.5
0300 2 A		2	2517	60	2 1/2'	8-PCLH	35	265	2.5	45	2.5	124	
0300 3 A		3	2517	60	2 1/2'	7-PCSH	50	265	2.5	45	2.5	124	
0300 4 A		4	3020	75	3"	7-PCSH	65	265	7.0	51	7.0	159	
0300 5 A		5	3535	90	3 1/2"	8-PCLH	80	265	5.0	89	5.0	178	
0300 6 A		6	3535	90	3 1/2"	7-PCSH	95	265	3.0	89	3.0	178	
0315 1 A	315	1	2012	50	2"	1-RHU	20	280	-	32	12.0	112	320.5
0315 2 A		2	2517	60	2 1/2'	4-ACLH	35	280	2.5	45	2.5	124	
0315 3 A		3	3020	75	3"	8-PCLH	50	280	2.5	51	2.5	159	
0315 4 A		4	3020	75	3"	7-PCSH	65	280	7.0	51	7.0	159	
0315 5 A		5	3535	90	3 1/2"	8-PCLH	80	280	5.0	89	5.0	178	
0315 6 A		6	3535	90	3 1/2"	7-PCSH	95	280	3.0	89	3.0	178	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED









❖ **FOR USE WITH 'A' & 'SPA' SECTION BELTS** ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0335 1 A	335	1	2012	50	2"	1-RHU	20	300	-	32	12.0	112	343.0
0335 2 A		2	2517	60	2 1/2'	4-ACLH	35	300	5.0	45	5.0	124	
0335 3 A		3	3020	75	3"	7-PCSH	50	300	0.5	51	0.5	159	
0335 4 A		4	3020	75	3"	7-PCSH	65	300	7.0	51	7.0	159	
0335 5 A		5	3535	90	3 1/2"	8-PCLH	80	300	4.5	89	4.5	178	
0335 6 A		6	3535	90	3 1/2"	7-PCSH	95	300	3.0	89	3.0	178	
0355 1 A	355	1	2012	50	2"	1-RHU	20	320	-	32	12.0	112	363.0
0355 2 A		2	2517	60	2 1/2'	4-ACLH	35	320	5.0	45	5.0	124	
0355 3 A		3	3020	75	3"	4-ACLH	50	320	0.5	51	0.5	159	
0355 4 A		4	3020	75	3"	5-ACSH	65	320	7.0	51	7.0	159	
0355 5 A		5	3535	90	3 1/2"	4-ACLH	80	320	4.5	89	4.5	178	
0355 6 A		6	3535	90	3 1/2"	5-ACSH	95	320	3.0	89	3.0	178	
0375 1 A	375	1	2012	50	2"	1-RHU	20	340	-	32	12.0	112	380.5
0375 2 A		2	2517	60	2 1/2'	4-ACLH	35	340	5.0	45	5.0	124	
0375 3 A		3	3020	75	3"	4-ACLH	50	340	0.5	51	0.5	159	
0375 4 A		4	3020	75	3"	5-ACSH	65	340	7.0	51	7.0	159	
0375 5 A		5	3535	90	3 1/2"	4-ACLH	80	340	4.5	89	4.5	178	
0375 6 A		6	3535	90	3 1/2"	5-ACSH	95	340	3.0	89	3.0	178	
0400 1 A	400	1	2012	50	2"	4-ACLH	20	365	-	32	12.0	112	405.5
0400 2 A		2	2517	60	2 1/2'	4-ACLH	35	365	5.0	45	5.0	124	
0400 3 A		3	3020	75	3"	4-ACLH	50	365	0.5	51	0.5	159	
0400 4 A		4	3020	75	3"	5-ACSH	65	365	7.0	51	7.0	159	
0400 5 A		5	3535	90	3 1/2"	4-ACLH	80	365	4.5	89	4.5	178	
0400 6 A		6	3535	90	3 1/2"	5-ACSH	95	365	3.0	89	3.0	178	
0425 1 A	425	1	2012	50	2"	4-ACLH	20	390	-	32	12.0	112	430.5
0425 2 A		2	2517	60	2 1/2'	4-ACLH	35	390	5.0	45	5.0	124	
0425 3 A		3	3020	75	3"	4-ACLH	50	390	0.5	51	0.5	159	
0425 4 A		4	3020	75	3"	5-ACSH	65	390	7.0	51	7.0	159	
0425 5 A		5	3535	90	3 1/2"	4-ACLH	80	390	4.5	89	4.5	178	
0425 6 A		6	3535	90	3 1/2"	5-ACSH	95	390	3.0	89	3.0	178	
0450 1 A	450	1	2012	50	2"	4-ACLH	20	415	-	32	12.0	112	455.5
0450 2 A		2	2517	60	2 1/2'	4-ACLH	35	415	5.0	45	5.0	124	
0450 3 A		3	3020	75	3"	4-ACLH	50	415	0.5	51	0.5	159	
0450 4 A		4	3020	75	3"	5-ACSH	65	415	7.0	51	7.0	159	
0450 5 A		5	3535	90	3 1/2"	4-ACLH	80	415	4.5	89	4.5	178	
0450 6 A		6	3535	90	3 1/2"	5-ACSH	95	415	3.0	89	3.0	178	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED









❖ **FOR USE WITH 'A' & 'SPA' SECTION BELTS** ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0475 1 A	475	1	2012	50	2"	4-ACLH	20	440	6.0	32	6.0	112	480.5
0475 2 A		2	2517	60	2 1/2"	4-ACLH	35	440	5.0	45	5.0	124	
0475 3 A		3	3020	75	3"	4-ACLH	50	440	0.5	51	0.5	159	
0475 4 A		4	3020	75	3"	5-ACSH	65	440	7.0	51	7.0	159	
0475 5 A		5	3535	90	3 1/2"	4-ACLH	80	440	4.5	89	4.5	178	
0475 6 A		6	3535	90	3 1/2"	5-ACSH	95	440	3.0	89	3.0	178	
0500 1 A	500	1	2517	50	2 1/2"	4-ACLH	20	465	12.5	45	12.5	124	505.5
0500 2 A		2	2517	60	2 1/2"	4-ACLH	35	465	5.0	45	5.0	124	
0500 3 A		3	3020	75	3"	4-ACLH	50	465	0.5	51	0.5	159	
0500 4 A		4	3020	75	3"	5-ACSH	65	465	7.0	51	7.0	159	
0500 5 A		5	3535	90	3 1/2"	4-ACLH	80	465	4.5	89	4.5	178	
0500 6 A		6	3535	90	3 1/2"	5-ACSH	95	465	3.0	89	3.0	178	
0530 1 A	530	1	2517	50	2 1/2"	4-ACLH	20	495	12.5	45	12.5	124	535.5
0530 2 A		2	2517	60	2 1/2"	4-ACLH	35	495	5.0	45	5.0	124	
0530 3 A		3	3020	75	3"	4-ACLH	50	495	0.5	51	0.5	159	
0530 4 A		4	3020	75	3"	5-ACSH	65	495	7.0	51	7.0	159	
0530 5 A		5	3535	90	3 1/2"	4-ACLH	80	495	4.5	89	4.5	178	
0530 6 A		6	3535	90	3 1/2"	5-ACSH	95	495	3.0	89	3.0	178	
0560 1 A	560	1	3020	50	3"	4-ACLH	20	525	15.5	51	15.5	159	565.5
0560 2 A		2	3020	60	3"	4-ACLH	35	525	8.0	51	8.0	159	
0560 3 A		3	3020	75	3"	4-ACLH	50	525	0.5	51	0.5	159	
0560 4 A		4	3535	75	3 1/2"	4-ACLH	65	525	12.0	89	12.0	178	
0560 5 A		5	3535	90	3 1/2"	4-ACLH	80	525	4.5	89	4.5	178	
0560 6 A		6	3535	90	3 1/2"	5-ACSH	95	525	3.0	89	3.0	178	
0630 1 A	630	1	3020	50	3"	4-ACLH	20	595	15.5	51	15.5	159	635.5
0630 2 A		2	3020	60	3"	4-ACLH	35	595	8.0	51	8.0	159	
0630 3 A		3	3020	60	3"	4-ACLH	50	595	0.5	51	0.5	159	
0630 4 A		4	3535	75	3 1/2"	4-ACLH	65	595	12.0	89	12.0	178	
0630 5 A		5	3535	90	3 1/2"	4-ACLH	80	595	4.5	89	4.5	178	
0630 6 A		6	4040	90	3 1/2"	5-ACSH	95	595	3.5	102	3.5	178	
0710 3 A	710	3	3020	50	3"	4-ACLH	50	675	0.5	51	0.5	159	715.5
0710 4 A		4	3535	90	3 1/2"	4-ACLH	65	675	12.0	89	12.0	178	
0710 5 A		5	3535	90	3 1/2"	4-ACLH	80	675	4.5	89	4.5	178	
0710 6 A		6	4040	100	4"	4-ACLH	95	675	3.5	102	3.5	216	
0800 3 A	800	3	3535	90	3 1/2"	4-ACLH	50	765	19.5	89	19.5	178	805.5
0800 4 A		4	3535	90	3 1/2"	4-ACLH	65	765	12.0	89	12.0	178	
0800 5 A		5	4040	100	4"	4-ACLH	80	765	11.0	102	11.0	216	
0800 6 A		6	4040	100	4"	4-ACLH	95	765	3.5	102	3.5	216	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED









❖ **FOR USE WITH 'B' & 'SPB' SECTION BELTS** ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0100 1 B	100	1	1610	42	1 5/3'	1-RHU	25	-	-	25	-	-	107
0100 2 B		2	1610	42	1 5/3'	6-LHO	44	60	19.0	25	-	-	
0100 3 B		3	1610	42	1 5/3'	6-LHO	63	60	38.0	25	-	-	
0106 1 B	106	1	1610	42	1 5/3'	1-RHU	25	-	-	25	-	-	113
0106 2 B		2	1610	42	1 5/3'	6-LHO	44	66	19.0	25	-	-	
0106 3 B		3	1610	42	1 5/3'	6-LHO	63	66	38.0	25	-	-	
0112 1 B	112	1	1610	42	1 5/3'	1-RHU	25	-	-	25	-	-	119
0112 2 B		2	1610	42	1 5/3'	6-RHO	44	72	19.0	25	-	-	
0112 3 B		3	1610	42	1 5/3'	6-RHO	63	72	38.0	25	-	-	
0118 1 B	118	1	1610	42	1 5/3'	1-RHU	25	-	-	25	-	-	125
0118 2 B		2	1610	42	1 5/3'	6-RHO	44	78	19.0	25	-	-	
0118 3 B		3	1610	42	1 5/3'	6-RHO	63	78	38.0	25	-	-	
0125 1 B	125	1	1610	42	1 5/3'	1-RHU	25	-	-	25	-	-	132
0125 2 B		2	1610	42	1 5/3'	6-LHO	44	85	19.0	25	-	-	
0125 3 B		3	1610	42	1 5/3'	6-LHO	63	85	38.0	25	-	-	
0125 4 B		4	2012	50	2"	3-LRH	82	85	25.0	32	25.0	-	
0125 5 B		5	2012	50	2"	3-LRH	101	85	34.5	32	34.5	-	
0125 6 B		6	2012	50	2"	3-LRH	120	85	44.0	32	44.0	-	
0132 1 B	132	1	1610	42	1 5/3'	1-RHU	25	-	-	25	-	-	139
0132 2 B		2	1610	42	1 5/3'	6-LHO	44	92	19.0	25	-	-	
0132 3 B		3	1610	42	1 5/3'	6-LHO	63	92	38.0	25	-	-	
0132 4 B		4	2012	50	2"	3-LRH	82	92	25.0	32	25.0	-	
0132 5 B		5	2012	50	2"	3-LRH	101	92	35.5	32	69.0	-	
0132 6 B		6	2012	50	2"	3-LRH	120	92	44.0	32	44.0	-	
0140 1 B	140	1	1610	42	1 5/3'	1-RHU	25	-	-	25	-	-	147
0140 2 B		2	1610	42	1 5/3'	6-LHO	44	100	19.0	25	-	-	
0140 3 B		3	1610	42	1 5/3'	6-LHO	63	100	38.0	25	-	-	
0140 4 B		4	2012	50	2"	3-LRH	82	100	25.0	32	25.0	-	
0140 5 B		5	2012	50	2"	2-RHO	101	100	-	32	69.0	-	
0140 6 B		6	2517	60	2 1/2'	2-RHO	120	100	-	45	75.0	-	
0150 1 B	150	1	1610	42	1 5/3'	1-RHU	25	-	-	25	-	-	157
0150 2 B		2	1610	42	1 5/3'	6-LHO	44	110	19.0	25	-	-	
0150 3 B		3	2012	50	2"	6-LHO	63	110	31.0	32	-	-	
0150 4 B		4	2012	50	2"	3-LRH	82	110	25.0	32	25.0	-	
0150 5 B		5	2517	60	2 1/2'	2-RHO	101	110	-	45	56.0	-	
0150 6 B		6	2517	60	2 1/2'	2-RHO	120	110	-	45	75.0	-	
0150 7 B		8	2517	60	2 1/2'	3-LRH	158	110	37.5	45	37.5	-	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED





❖ FOR USE WITH 'B' & 'SPB' SECTION BELTS ❖





Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								

FOR USE WITH 'B'/'SPB' SECTION BELTS

0160 1 B	160	1	1610	42	1 5/3'	1-RHU	25	-	-	25	-	-	167
0160 2 B		2	2012	50	2"	6-LHO	44	114	-	32	-	-	
0160 3 B		3	2517	60	2 1/2'	6-LHO	63	114	-	45	-	-	
0160 4 B		4	2517	60	2 1/2'	3-LRH	82	114	18.5	45	18.5	-	
0160 5 B		5	2517	60	2 1/2'	3-LRH	101	114	28.0	45	28.0	-	
0160 6 B		6	2517	60	2 1/2'	2-RHO	120	114	-	45	75.0	-	
0160 7 B		7	3020	75	3"	3-LRH	120	114	53.5	51	53.5	-	
0160 8 B		8	3020	75	3"	3-LRH	158	114	53.5	51	53.5	-	
0170 1 B	170	1	1610	42	1 5/3'	1-RHU	25	-	-	25	-	-	177
0170 2 B		2	2012	50	2"	6-LHO	44	124	-	32	-	-	
0170 3 B		3	2517	60	2 1/2'	6-LHO	63	124	-	45	-	-	
0170 4 B		4	2517	60	2 1/2'	3-LRH	82	124	18.5	45	18.5	-	
0170 5 B		5	3020	75	3"	3-LRH	101	124	25.0	51	25.0	-	
0170 6 B		6	3020	75	3"	2-RHO	120	124	-	51	69.0	-	
0170 7 B		7	3030	75	3"	3-LRH	120	124	53.5	51	53.5	-	
0170 8 B		8	3030	75	3"	3-LRH	158	124	53.5	51	53.5	-	
0180 1 B	180	1	1610	42	1 5/3'	1-RHU	25	-	-	25	-	-	187
0180 2 B		2	2012	50	2"	6-LHO	44	134	-	32	-	-	
0180 3 B		3	2517	60	2 1/2'	6-LHO	63	134	-	45	-	-	
0180 4 B		4	2517	60	2 1/2'	3-LRH	82	134	18.5	45	18.5	-	
0180 5 B		5	3020	75	3"	3-LRH	101	134	25.0	51	25.0	-	
0180 6 B		6	3020	75	3"	2-RHO	120	134	-	51	69.0	-	
0180 7 B		7	3030	75	3"	3-LRH	120	134	53.5	51	53.5	-	
0180 8 B		8	3030	75	3"	3-LRH	158	134	53.5	51	53.5	-	
0190 1 B	190	1	2012	50	2"	1-RHU	25	-	-	32	7	112	197
0190 2 B		2	2517	60	2 1/2"	1-RHU	44	-	-	44	-	-	
0190 3 B		3	2517	60	2 1/2"	6-LHO	63	144	18.0	45	-	-	
0190 4 B		4	2517	60	2 1/2"	3-LRH	82	144	18.5	45	18.5	-	
0190 5 B		5	3020	75	3"	3-LRH	101	144	25.0	51	25.0	-	
0190 6 B		6	3020	75	3"	2-RHO	120	144	-	51	69.0	-	
0190 7 B		7	3030	75	3"	3-LRH	120	144	53.5	51	53.5	-	
0190 8 B		8	3030	75	3"	3-LRH	158	144	53.5	51	53.5	-	
0200 1 B	200	1	2012	50	2"	1-RHU	25	-	-	32	7	112	207
0200 2 B		2	2517	60	2 1/2"	1-RHU	44	-	-	44	-	-	
0200 3 B		3	2517	60	2 1/2"	2-RHO	63	154	-	45	18.0	-	
0200 4 B		4	3020	75	3"	2-RHO	82	154	-	51	31.0	-	
0200 5 B		5	3020	75	3"	2-RHO	101	154	-	51	50.0	-	
0200 6 B		6	3020	75	3"	2-RHO	120	154	-	51	69.0	-	
0200 7 B		7	3535	75	3"	3-LRH	120	154	34.5	89	34.5	-	
0200 8 B		8	3535	75	3"	3-LRH	158	154	34.5	89	34.5	-	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED



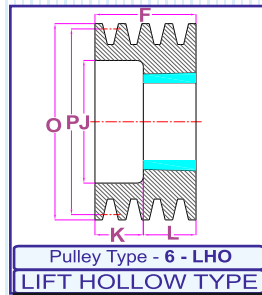





❖ FOR USE WITH 'B' & 'SPB' SECTION BELTS ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								

FOR USE WITH 'B'/'SPB' SECTION BELTS

0212 1 B	212	1	2012	50	2"	1-RHU	25	-	-	32	7.0	112	219
0212 2 B		2	2517	60	2 1/2'	1-RHU	44	166	-	45	-	-	
0212 3 B		3	2517	60	2 1/2'	2-RHO	63	166	-	45	18.0	-	
0212 4 B		4	3020	75	3"	2-RHO	82	166	-	51	31.0	-	
0212 5 B		5	3020	75	3"	2-RHO	101	166	-	51	50.0	-	
0212 6 B		6	3020	75	3"	2-RHO	120	166	-	51	69.0	-	
0212 8 B		8	3535	90	3 1/2"	3-LRH	158	166	34.5	89	34.5	-	
0224 1 B	224	1	2012	50	2"	1-RHU	25	-	-	32	7.0	112	231
0224 2 B		2	2517	50	2 1/2'	1-RHU	44	178	-	45	-	-	
0224 3 B		3	2517	50	2 1/2'	2-RHO	63	178	-	45	18.5	-	
0224 4 B		4	3020	75	3"	2-RHO	82	178	-	51	31.0	-	
0224 5 B		5	3020	75	3"	2-RHO	101	178	-	51	50.0	-	
0224 6 B		6	3020	75	3"	2-RHO	120	178	-	51	69.0	-	
0224 8 B		8	3535	90	3 1/2"	3-LRH	158	178	34.5	89	34.5	-	
0224 10 B		10	3535	90	3 1/2"	3-LRH	196	178	53.5	89	53.5	-	
0236 1 B	236	1	2012	50	2"	1-RHU	25	-	-	32	7.0	112	243
0236 2 B		2	2517	60	2 1/2'	1-RHU	44	-	-	45	-	-	
0236 3 B		3	2517	60	2 1/2'	2-RHO	63	190	-	45	18.0	-	
0236 4 B		4	3020	75	3"	2-RHO	82	190	-	51	31.0	-	
0236 5 B		5	3020	75	3"	2-RHO	101	190	-	51	50.0	-	
0236 6 B		6	3020	75	3"	2-RHO	120	190	-	51	69.0	-	
0236 8 B		8	3535	90	3 1/2"	3-LRH	158	190	34.5	89	34.5	-	
0236 10 B		10	3535	90	3 1/2"	3-LRH	196	190	53.5	89	53.5	-	
0236 1 B	250	1	2012	50	2"	1-RHU	25	-	-	32	7.0	112	257
0236 2 B		2	2517	60	2 1/2'	8-PCLH	44	-	-	44	-	-	
0236 3 B		3	3020	75	3"	2-RHO	63	204	-	51	12.0	-	
0236 4 B		4	3020	75	3"	2-RHO	82	204	-	51	31.0	-	
0236 5 B		5	3020	75	3"	2-RHO	101	204	-	51	50.0	-	
0236 6 B		6	3020	75	3"	2-RHO	120	204	-	51	69.0	-	
0236 8 B		8	3535	90	3 1/2"	3-LRH	158	204	34.5	89	34.5	-	
0236 10 B		10	3535	90	3 1/2"	3-LRH	196	204	53.5	89	53.5	-	
0265 1 B	265	1	2012	50	2"	1-RHU	25	219	-	32	7.0	112	272
0265 1 B		2	2517	60	2 1/2'	8-PCLH	44	219	-	45	-	124	
0265 1 B		3	3020	75	3"	7-PCSH	63	219	6.0	51	6.0	159	
0265 1 B		4	3020	75	3"	7-PCSH	82	219	15.5	51	15.5	159	
0265 1 B		5	3535	90	3 1/2"	7-PCSH	101	219	6.0	89	6.0	178	
0265 1 B		6	3535	90	3 1/2"	7-PCSH	120	219	15.5	89	15.5	178	
0265 1 B		8	3535	90	3 1/2"	7-PCSH	158	219	34.5	89	34.5	178	
0265 1 B		10	3535	90	3 1/2"	7-PCSH	196	219	53.5	89	53.5	178	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED



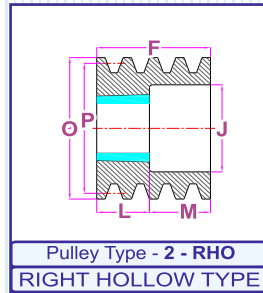



❖ FOR USE WITH 'B' & 'SPB' SECTION BELTS ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)		
				Met.	Imp.										
0280 1 B	280	1	2012	50	2"	1-RHU	25	234	-	32	7.0	112	287		
0280 2 B		2	2517	60	2 1/2"	8-PCLH	44	234	-	45	-	124			
0280 3 B		3	3020	75	3"	7-PCSH	63	234	6.0	51	6.0	159			
0280 4 B		4	3020	75	3"	7-PCSH	82	234	15.5	51	15.5	159			
0280 5 B		5	3535	90	3 1/2"	7-PCSH	101	234	6.0	89	6.0	178			
0280 6 B		6	3535	90	3 1/2"	7-PCSH	120	234	15.5	89	15.5	178			
0280 8 B		8	3535	90	3 1/2"	7-PCSH	158	234	34.5	89	34.5	178			
0280 10 B		10	3535	90	3 1/2"	7-PCSH	196	234	53.5	89	53.5	178			
0300 1 B		300	1	2012	50	2"	1-RHU	25	254	-	32	7.0		112	307
0300 2 B			2	2517	60	2 1/2"	8-PCLH	44	254	-	45	-		124	
0300 3 B	3		3020	75	3"	7-PCSH	63	254	6.0	51	6.0	159			
0300 4 B	4		3535	90	3 1/2"	8-PCLH	82	254	-	51	-	178			
0300 5 B	5		3535	90	3 1/2"	7-PCSH	101	254	6.0	89	6.0	178			
0300 6 B	6		3535	90	3 1/2"	7-PCSH	120	254	15.5	89	15.5	178			
0300 8 B	8		3535	90	3 1/2"	7-PCSH	158	254	34.5	89	34.5	178			
0300 10 B	10		3535	90	3 1/2"	7-PCSH	196	254	53.5	89	53.5	178			
0315 1 B	315		1	2012	50	2"	1-RHU	25	269	-	32	7.0	112	322	
0315 2 B			2	2517	60	2 1/2"	8-PCLH	44	269	-	45	-	124		
0315 3 B		3	3020	75	3"	7-PCSH	63	269	6.0	51	6.0	159			
0315 4 B		4	3535	90	3 1/2"	8-PCLH	82	269	-	89	-	178			
0315 5 B		5	3535	90	3 1/2"	7-PCSH	101	269	6.0	89	6.0	178			
0315 6 B		6	3535	90	3 1/2"	7-PCSH	120	269	15.5	89	15.5	178			
0315 8 B		8	3535	90	3 1/2"	7-PCSH	158	269	34.5	89	35.0	178			
0315 10 B		10	3535	90	3 1/2"	7-PCSH	196	269	53.5	89	53.5	178			
0335 2 B		335	2	3020	60	3"	1-RHU	44	289	-	51	-	159		342
0335 3 B			3	3020	75	3"	7-PCSH	63	289	6.0	51	6.0	159		
0335 4 B	4		3535	90	3 1/2"	8-PCLH	82	289	-	89	-	178			
0335 5 B	5		3535	90	3 1/2"	7-PCSH	101	289	3.5	89	6.0	178			
0335 6 B	6		3535	90	3 1/2"	7-PCSH	120	289	15.5	89	15.5	178			
0335 8 B	8		3535	90	3 1/2"	7-PCSH	158	289	34.5	89	35.4	178			
0335 10 B	10		4040	100	4"	7-PCSH	196	289	53.5	102	47.0	216			
0355 2 B	355		2	3020	60	3"	4-ACLH	44	309	3.5	51	3.5	159	362	
0355 3 B		3	3020	75	3"	5-ACSH	63	309	6.0	51	6.0	159			
0355 4 B		4	3535	90	3 1/2"	8-PCLH	82	309	-	89	-	178			
0355 5 B		5	3535	90	3 1/2"	7-PCSH	101	309	6.0	89	6.0	178			
0355 6 B		6	3535	90	3 1/2"	7-PCSH	120	309	15.5	89	15.5	178			
0355 8 B		8	3535	90	3 1/2"	7-PCSH	158	309	34.5	89	34.5	178			
0355 10 B		10	4040	100	4"	7-PCSH	196	309	47.0	102	47.0	216			

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED









❖ FOR USE WITH 'B' & 'SPB' SECTION BELTS ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0375 2 B	375	2	3020	75	3"	4-ACLH	44	329	3.5	51	3.5	159	382
0375 3 B		3	3020	75	3"	4-ACLH	63	329	13.0	89	13.0	159	
0375 4 B		4	3535	90	3 1/2"	4-ACLH	82	329	3.5	89	3.5	178	
0375 5 B		5	3535	90	3 1/2"	5-ACSH	101	329	6.01	89	6.0	178	
0375 6 B		6	3535	90	3 1/2"	5-ACSH	120	329	53.5	89	15.5	178	
0375 8 B		8	4040	100	4"	5-ACSH	158	329	28.0	89	28.0	216	
0375 10 B		10	4040	100	4"	5-ACSH	196	329	47.0	89	47.0	216	
0400 2 B	400	2	3020	75	3"	4-ACLH	44	354	3.5	51	3.5	159	407
0400 3 B		3	3535	90	3 1/2"	4-ACLH	63	354	13.0	89	13.0	178	
0400 4 B		4	3535	90	3 1/2"	4-ACLH	82	354	3.5	89	3.5	178	
0400 5 B		5	3535	90	3 1/2"	5-ACSH	101	354	6.0	89	6.0	178	
0400 6 B		6	3535	90	3 1/2"	5-ACSH	120	354	15.5	89	15.5	178	
0400 8 B		8	4040	100	4"	5-ACSH	158	354	28.0	102	28.0	216	
0400 10 B		10	4040	100	4"	5-ACSH	196	354	47.0	102	47.0	216	
0425 2 B	425	2	3020	75	3"	4-ACLH	44	379	3.5	51	3.5	159	432
0425 3 B		3	3535	90	3 1/2"	4-ACLH	63	379	13.0	89	13.0	178	
0425 4 B		4	3535	90	3 1/2"	4-ACLH	82	379	3.5	89	3.5	178	
0425 5 B		5	3535	90	3 1/2"	5-ACSH	101	379	6.0	89	6.0	178	
0425 6 B		6	3535	90	3 1/2"	5-ACSH	120	379	15.5	89	15.5	178	
0425 8 B		8	4040	100	4"	5-ACSH	158	379	28.0	102	28.0	216	
0425 10 B		10	4040	100	4"	5-ACSH	196	379	47.0	102	47.0	216	
0450 2 B	450	2	3020	75	3"	4-ACLH	44	404	3.5	51	3.5	159	457
0450 3 B		3	3535	90	3 1/2"	4-ACLH	63	404	13.0	89	13.0	178	
0450 4 B		4	3535	90	3 1/2"	4-ACLH	82	404	3.5	89	3.5	178	
0450 5 B		5	3535	90	3 1/2"	5-ACSH	101	404	6.0	89	6.0	178	
0450 6 B		6	4040	100	4"	5-ACSH	120	404	9.0	102	9.0	216	
0450 8 B		8	4545	110	4 1/2"	5-ACSH	158	404	22.0	114	22.0	242	
0450 10 B		10	4545	110	4 1/2"	5-ACSH	196	404	41.0	114	41.0	242	
0475 2 B	475	2	3020	75	3"	4-ACLH	44	429	3.5	51	3.5	159	482
0475 3 B		3	3535	90	3 1/2"	4-ACLH	63	429	13.0	89	13.0	178	
0475 4 B		4	3535	90	3 1/2"	4-ACLH	82	429	3.5	89	3.5	178	
0475 5 B		5	3535	90	3 1/2"	5-ACSH	101	429	6.0	89	6.0	178	
0475 6 B		6	4040	100	4"	5-ACSH	120	429	9.0	89	9.0	216	
0475 8 B		8	4545	110	4 1/2"	5-ACSH	158	429	22.0	102	22.0	242	
0475 10 B		10	4545	110	4 1/2"	5-ACSH	196	429	41.0	114	41.0	242	
0500 2 B	500	2	3020	75	3"	4-ACLH	44	454	3.5	51	3.5	159	507
0500 3 B		3	3535	90	3 1/2"	4-ACLH	63	454	13.0	89	13.0	178	
0500 4 B		4	3535	90	3 1/2"	4-ACLH	82	454	3.5	89	3.5	178	
0500 5 B		5	3535	90	3 1/2"	5-ACSH	101	454	6.0	89	6.0	178	
0500 6 B		6	4040	100	4"	5-ACSH	120	454	9.0	102	9.0	216	
0500 8 B		8	4545	110	4 1/2"	5-ACSH	158	454	22.0	114	22.0	242	
0500 10 B		10	4545	110	4 1/2"	5-ACSH	196	454	41.0	114	41.0	242	





DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED



◆ FOR USE WITH 'B' & 'SPB' SECTION BELTS ◆

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0530 2 B	530	2	3020	75	3"	4-ACLH	44	484	3.5	51	3.5	159	537
0530 3 B		3	3535	90	3 1/2"	4-ACLH	63	484	13.0	89	13.0	178	
0530 4 B		4	3535	90	3 1/2"	4-ACLH	82	484	3.5	89	3.5	178	
0530 5 B		5	4040	100	4"	4-ACLH	101	484	0.5	102	0.5	216	
0530 6 B		6	4040	100	4"	5-ACSH	120	484	9.0	102	9.0	216	
0530 8 B		8	4545	110	4 1/2"	5-ACSH	158	484	22.0	114	22.0	242	
0530 10 B		10	4545	110	4 1/2"	5-ACSH	196	484	41.0	114	41.0	242	
0560 2 B	560	2	3020	75	3"	4-ACLH	44	514	3.5	51	3.5	159	567
0560 3 B		3	3535	90	3 1/2"	4-ACLH	63	514	13.0	89	13.0	178	
0560 4 B		4	3535	90	3 1/2"	4-ACLH	82	514	3.5	89	3.5	178	
0560 5 B		5	4040	100	4"	4-ACLH	101	514	0.5	102	0.5	216	
0560 6 B		6	4040	100	4"	5-ACSH	120	514	9.0	102	9.0	216	
0560 8 B		8	4545	110	4 1/2"	5-ACSH	158	514	22.0	114	22.0	242	
0560 10 B		10	4545	110	4 1/2"	5-ACSH	196	514	41.0	114	41.0	242	
0600 2 B	600	2	3020	75	3"	4-ACLH	44	554	3.5	51	3.5	159	607
0600 3 B		3	3535	90	3 1/2"	4-ACLH	63	554	13.0	89	13.0	178	
0600 4 B		4	3535	90	3 1/2"	4-ACLH	82	554	3.5	89	3.5	178	
0600 5 B		5	4040	100	4"	4-ACLH	101	554	0.5	102	0.5	216	
0600 6 B		6	4040	100	4"	5-ACSH	120	554	9.0	102	9.0	216	
0600 8 B		8	4545	110	4 1/2"	5-ACSH	158	554	22.0	114	22.0	242	
0600 10 B		10	4545	110	4 1/2"	5-ACSH	196	554	41.0	114	41.0	242	
0630 2 B	630	2	3030	75	3"	4-ACLH	44	584	16.0	76	16.0	159	637
0630 3 B		3	3535	90	3 1/2"	4-ACLH	63	584	13.0	89	13.0	178	
0630 4 B		4	3535	90	3 1/2"	4-ACLH	82	584	3.5	89	3.5	178	
0630 5 B		5	4040	100	4"	4-ACLH	101	584	0.5	102	0.5	216	
0630 6 B		6	4040	100	4"	5-ACSH	120	584	9.0	102	9.0	216	
0630 8 B		8	4545	110	4 1/2"	5-ACSH	158	584	22.0	114	22.0	242	
0630 10 B		10	4545	110	4 1/2"	5-ACSH	196	584	41.0	114	41.0	242	
0710 2 B	710	2	3030	75	3"	4-ACLH	44	664	16.0	76	16.0	159	717
0710 3 B		3	3535	90	3 1/2"	4-ACLH	63	664	13.0	89	13.0	178	
0710 4 B		4	3535	90	3 1/2"	4-ACLH	82	664	3.5	89	3.5	178	
0710 5 B		5	4040	100	4"	4-ACLH	101	664	0.5	102	0.5	216	
0710 6 B		6	4545	110	4 1/2"	5-ACSH	120	664	3.0	114	3.0	242	
0710 8 B		8	4545	110	4 1/2"	5-ACSH	158	664	22.0	114	22.0	242	
0710 10 B		10	4545	110	4 1/2"	5-ACSH	196	664	41.0	114	41.0	242	
0762 2 B	762	2	3030	75	3"	4-ACLH	44	716	16.0	76	16.0	159	769
0762 3 B		3	3535	90	3 1/2"	4-ACLH	63	716	13.0	89	13.0	178	
0762 4 B		4	4040	100	4"	4-ACLH	82	716	10.0	102	10.0	178	
0762 5 B		5	4040	100	4"	4-ACLH	101	716	0.5	102	0.5	216	
0762 6 B		6	4545	110	4 1/2"	5-ACSH	120	716	3.0	114	3.0	242	
0762 8 B		8	4545	110	4 1/2"	5-ACSH	158	716	22.0	114	22.0	242	
0762 10 B		10	4545	110	4 1/2"	5-ACSH	196	716	41.0	114	41.0	242	





DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED



❖ FOR USE WITH 'B' & 'SPB' SECTION BELTS ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0800 2 B	800	2	3030	75	3"	4-ACLH	44	754	16.0	76	16.0	159	807
0800 3 B		3	3535	90	3 1/2"	4-ACLH	63	754	13.0	89	13.0	178	
0800 4 B		4	4040	100	4"	4-ACLH	82	754	10.0	102	10.0	216	
0800 5 B		5	4040	100	4"	4-ACLH	101	754	0.5	102	0.5	216	
0800 6 B		6	4040	100	4"	5-ACSH	120	754	3.0	114	3.0	216	
0800 8 B		8	4545	110	4 1/2"	5-ACSH	158	754	22.0	114	22.0	242	
0800 10 B		10	4545	110	4 1/2"	5-ACSH	196	754	41.0	114	41.0	242	
0900 3 B	900	3	3535	90	3 1/2"	4-ACLH	63	854	13.0	89	13.0	178	907
0900 4 B		4	4040	100	4"	4-ACLH	82	854	10.0	102	10.0	216	
0900 5 B		5	4545	110	4 1/2"	4-ACLH	101	854	6.5	114	6.5	242	
0900 6 B		6	4545	110	4 1/2"	5-ACSH	120	854	3.0	114	3.0	242	
0900 8 B		8	4545	110	4 1/2"	5-ACSH	158	854	22.0	114	22.0	242	
0900 10 B		10	5050	125	5"	5-ACSH	196	854	34.5	127	34.5	267	
01000 3 B	1000	3	4040	100	4"	4-ACLH	63	954	19.5	102	19.5	216	1007
01000 4 B		4	4040	100	4"	4-ACLH	82	954	10.0	102	10.0	216	
01000 5 B		5	4545	110	4 1/2"	4-ACLH	101	954	6.5	114	6.5	242	
01000 6 B		6	4545	110	4 1/2"	5-ACSH	120	954	3.0	114	3.0	242	
01000 8 B		8	5050	125	5"	5-ACSH	158	954	15.5	127	15.5	267	
01000 10 B		10	5050	125	5"	5-ACSH	196	954	34.5	127	34.5	267	
01250 3 B	1250	3	4040	100	4"	4-ACLH	63	1204	19.5	102	19.5	216	1257
01250 4 B		4	4040	100	4"	4-ACLH	82	1204	10.0	102	10.0	216	
01250 5 B		5	4545	110	4 1/2"	4-ACLH	101	1204	6.5	114	6.5	242	
01250 6 B		6	5050	125	5"	5-ACSH	120	1204	3.0	127	3.0	267	
01250 8 B		8	5050	125	5"	5-ACSH	158	1204	15.5	127	15.5	267	
01250 10 B		10	5050	125	5"	5-ACSH	196	1204	34.5	127	34.5	267	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

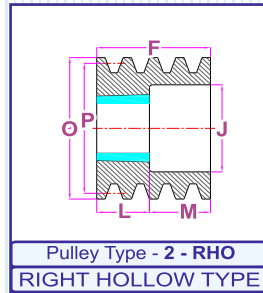





❖ FOR USE WITH 'C' & 'SPC' SECTION BELTS ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								

FOR USE WITH 'C'/'SPC' SECTION BELTS

0200 3 C	200	3	2517	60	2 1/2"	2-RHO	85	151	-	45	40.0	-	209.6
0200 4 C		4	3020	75	3"	3-LRH	111	151	30.0	89	30.0	-	
0200 5 C		5	3535	90	3 1/2"	3-LRH	136	151	16.0	89	31.0	-	
0200 6 C		6	3535	90	3 1/2"	3-LRH	162	151	16.0	89	57.0	-	
0200 7 C		7	3535	90	3 1/2"	3-LRH	187	151	36.0	89	62.0	-	
0200 8 C		8	3535	90	3 1/2"	3-LRH	213	151	46.0	102	78.0	-	
0212 3 C	212	3	3020	75	3"	2-RHO	85	163	-	51	34.0	-	221.6
0212 4 C		4	3020	75	3"	3-LRH	111	163	30.0	89	30.0	-	
0212 5 C		5	3535	90	3 1/2"	3-LRH	136	163	16.0	89	31.0	-	
0212 6 C		6	3535	90	3 1/2"	3-LRH	162	163	36.0	89	36.5	-	
0212 7 C		7	3535	90	3 1/2"	3-LRH	187	163	36.0	89	62.0	-	
0212 8 C		8	3535	90	3 1/2"	3-LRH	213	163	46.0	89	78.0	-	
0224 3 C	224	3	3020	75	3"	2-RHO	85	161	-	51	34.0	-	233.6
0224 4 C		4	3535	90	3 1/2"	3-LRH	111	161	11.0	89	11.0	-	
0224 5 C		5	3535	90	3 1/2"	3-LRH	136	161	24.5	89	24.5	-	
0224 6 C		6	3535	90	3 1/2"	3-LRH	162	161	36.5	89	36.5	-	
0224 7 C		7	3535	90	3 1/2"	3-LRH	187	161	36.0	89	62.5	-	
0224 8 C		8	3535	90	3 1/2"	3-LRH	213	161	46.0	89	78.0	-	
0236 3 C	236	3	3020	75	3"	2-RHO	85	173	-	51	34.0	-	245.6
0236 4 C		4	3535	90	3 1/2"	3-LRH	111	173	11.0	89	11.0	-	
0236 5 C		5	3535	90	3 1/2"	3-LRH	136	173	24.5	89	24.5	-	
0236 6 C		6	3535	90	3 1/2"	3-LRH	162	173	36.5	89	36.5	-	
0236 7 C		7	3535	90	3 1/2"	3-LRH	187	173	36.0	89	62.0	-	
0236 8 C		8	3535	90	3 1/2"	3-LRH	213	173	46.0	89	78.0	-	
0250 3 C	250	3	3020	75	3"	2-RHO	85	187	-	51	34.0	-	259.6
0250 4 C		4	3535	90	3 1/2"	3-LRH	111	187	11.0	89	11.0	-	
0250 5 C		5	3535	90	3 1/2"	3-LRH	136	187	24.5	89	24.5	-	
0250 6 C		6	3535	90	3 1/2"	3-LRH	162	187	36.5	89	36.5	-	
0250 7 C		7	3535	90	3 1/2"	3-LRH	187	187	62.0	89	62.0	-	
0250 8 C		8	3535	90	3 1/2"	3-LRH	213	187	62.0	89	62.0	-	
0250 10 C	10	4040	100	4"	3-LRH	264	187	81.0	102	81.0	-		
0265 3 C	265	3	3535	90	3 1/2"	7-PCSH	85	202	2.0	89	2.0	178	274.6
0265 4 C		4	3535	90	3 1/2"	3-LRH	111	202	11.0	89	11.0	-	
0265 5 C		5	3535	90	3 1/2"	3-LRH	136	202	24.5	89	24.5	-	
0265 6 C		6	3535	90	3 1/2"	3-LRH	162	202	36.5	89	36.5	-	
0265 7 C		7	3535	90	3 1/2"	3-LRH	187	202	62.0	89	62.0	-	
0265 8 C		8	3535	90	3 1/2"	3-LRH	213	202	62.0	89	62.0	-	
0265 10 C	10	4040	100	4"	3-LRH	264	202	81.0	102	81.0	-		





DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED



❖ FOR USE WITH 'C' & 'SPC' SECTION BELTS ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0280 3 C	280	3	3535	90	3 1/2"	7-PCSH	85	217	2.0	89	2.0	178	289.6
0280 4 C		4	3535	90	3 1/2"	3-LRH	111	217	11.0	89	11.0	-	
0280 5 C		5	3535	90	3 1/2"	3-LRH	136	217	23.5	89	23.5	-	
0280 6 C		6	3535	90	3 1/2"	3-LRH	162	217	36.5	89	36.5	-	
0280 7 C		7	3535	90	3 1/2"	3-LRH	187	217	62.0	89	62.0	-	
0280 8 C		8	3535	90	3 1/2"	3-LRH	213	217	62.0	89	62.0	-	
0280 10 C		10	4040	100	4"	3-LRH	264	217	81.0	102	81.0	-	
0300 3 C	300	3	3535	90	3 1/2"	8-PCLH	85	237	-	89	-	178	309.6
0300 4 C		4	3535	90	3 1/2"	7-PCSH	111	237	11.0	89	11.0	178	
0300 5 C		5	3535	90	3 1/2"	7-PCSH	136	237	23.5	89	23.5	178	
0300 6 C		6	3535	90	3 1/2"	7-PCSH	162	237	36.5	89	36.5	178	
0300 7 C		7	3535	90	3 1/2"	7-PCSH	187	237	49.0	89	49.0	178	
0300 8 C		8	4040	100	4"	3-LRH	213	237	55.5	102	55.0	-	
0300 10 C		10	4545	110	4 1/2"	3-LRH	264	237	75.0	114	75.0	-	
0315 3 C	315	3	3535	90	3 1/2"	8-PCLH	85	252	-	89	-	178	324.6
0315 4 C		4	3535	90	3 1/2"	7-PCSH	111	252	11.0	89	11.0	178	
0315 5 C		5	3535	90	3 1/2"	7-PCSH	136	252	23.5	89	23.5	178	
0315 6 C		6	3535	90	3 1/2"	7-PCSH	162	252	36.5	89	36.5	178	
0315 7 C		7	3535	90	3 1/2"	7-PCSH	187	252	49.0	89	49.0	178	
0315 8 C		8	4040	100	4"	3-LRH	213	252	55.5	102	55.5	-	
0315 10 C		10	4545	110	4 1/2"	3-LRH	264	252	75.0	114	75.0	-	
0335 3 C	335	3	3535	90	3 1/2"	8-PCLH	85	272	-	89	-	178	344.6
0335 4 C		4	3535	90	3 1/2"	7-PCSH	111	272	11.0	89	11.0	178	
0335 5 C		5	3535	90	3 1/2"	7-PCSH	136	272	23.5	89	23.5	178	
0335 6 C		6	3535	90	3 1/2"	7-PCSH	162	272	36.5	89	36.5	178	
0335 7 C		7	3535	90	3 1/2"	7-PCSH	187	272	49.0	89	49.0	178	
0335 8 C		8	4040	100	4"	3-LRH	213	272	55.5	102	55.5	-	
0335 10 C		10	4545	110	4 1/2"	3-LRH	264	272	75.0	114	75.0	-	
0355 3 C	355	3	3535	90	3 1/2"	8-PCLH	85	292	-	89	-	178	364.6
0355 4 C		4	3535	90	3 1/2"	7-PCSH	111	292	11.0	89	11.0	178	
0355 5 C		5	3535	90	3 1/2"	7-PCSH	136	292	23.5	89	23.5	178	
0355 6 C		6	3535	90	3 1/2"	7-PCSH	162	292	36.5	89	36.5	178	
0355 7 C		7	4040	100	4"	7-PCSH	187	292	42.5	102	42.5	216	
0355 8 C		8	4040	100	4"	7-PCSH	213	292	55.5	102	55.5	216	
0355 10 C		10	4545	100	4 1/2"	7-PCSH	264	292	75.0	114	75.0	242	
0375 3 C	375	3	3535	90	3 1/2"	8-PCLH	85	312	-	89	-	178	384.6
0375 4 C		4	3535	90	3 1/2"	7-PCSH	111	312	11.0	89	11.0	178	
0375 5 C		5	3535	90	3 1/2"	7-PCSH	136	312	23.5	89	24.5	178	
0375 6 C		6	4040	100	4"	7-PCSH	162	312	30.0	102	30.0	216	
0375 7 C		7	4040	100	4"	7-PCSH	187	312	42.5	102	42.5	216	
0375 8 C		8	4545	110	4 1/2"	7-PCSH	213	312	49.5	114	49.5	242	
0375 10 C		10	4545	110	4 1/2"	7-PCSH	264	312	75.0	114	75.0	242	





DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED



❖ FOR USE WITH 'C' & 'SPC' SECTION BELTS ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0400 3 C	400	3	3535	90	3 1/2"	4-ACLH	85	337	2.0	89	2.0	178	409.6
0400 4 C		4	3535	90	3 1/2"	5-ACSH	111	337	11.0	89	11.0	178	
0400 5 C		5	3535	90	3 1/2"	5-ACSH	136	337	23.5	89	23.5	178	
0400 6 C		6	4040	100	4"	7-PCSH	162	337	30.0	102	30.0	216	
0400 7 C		7	4545	110	4 1/2"	7-PCSH	187	337	36.5	114	36.5	242	
0400 8 C		8	4545	110	4 1/2"	7-PCSH	213	337	49.5	114	49.5	242	
0400 10 C		10	5050	125	5"	7-PCSH	264	337	68.5	127	68.5	267	
0425 3 C	425	3	3535	90	3 1/2"	4-ACLH	85	362	2.0	89	2.0	178	434.6
0425 4 C		4	3535	90	3 1/2"	5-ACSH	111	362	11.0	89	11.0	178	
0425 5 C		5	4040	100	4"	7-PCSH	136	362	17.0	102	17.0	216	
0425 6 C		6	4545	110	4 1/2"	7-PCSH	162	362	24.0	114	24.0	242	
0425 7 C		7	4545	110	4 1/2"	7-PCSH	187	362	36.5	114	36.5	242	
0425 8 C		8	5050	125	5"	7-PCSH	213	362	43.0	127	43.0	267	
0425 10 C		10	5050	125	5"	7-PCSH	264	362	68.5	127	68.5	267	
0450 3 C	450	3	3535	90	3 1/2"	4-ACLH	85	387	2.0	89	2.0	178	459.6
0450 4 C		4	3535	90	3 1/2"	5-ACSH	111	387	11.0	89	11.0	178	
0450 5 C		5	4040	100	4"	7-PCSH	136	387	17.0	102	17.0	216	
0450 6 C		6	4545	110	4 1/2"	7-PCSH	162	387	24.0	114	24.0	242	
0450 7 C		7	5050	125	5"	7-PCSH	187	387	30.0	127	30.0	267	
0450 8 C		8	5050	125	5"	7-PCSH	213	387	43.0	127	43.0	267	
0450 10 C		10	5050	125	5"	7-PCSH	264	387	68.5	127	68.5	267	
0475 3 C	475	3	3535	90	3 1/2"	4-ACLH	85	412	2.0	89	2.0	178	484.6
0475 4 C		4	3535	90	3 1/2"	5-ACSH	111	412	11.0	89	11.0	178	
0475 5 C		5	4040	100	4"	5-ACSH	136	412	17.0	102	17.0	216	
0475 6 C		6	4545	110	4 1/2"	7-PCSH	162	412	24.0	114	24.0	242	
0475 7 C		7	5050	125	5"	7-PCSH	187	412	30.0	127	30.0	267	
0475 8 C		8	5050	125	5"	7-PCSH	213	412	43.0	127	43.0	267	
0475 10 C		10	5050	125	5"	7-PCSH	264	412	68.5	127	68.5	267	
0500 3 C	500	3	3535	90	3 1/2"	4-ACLH	85	437	2.0	89	2.0	178	509.6
0500 4 C		4	3535	90	3 1/2"	5-ACSH	111	437	11.0	89	11.0	178	
0500 5 C		5	4040	100	4"	5-ACSH	136	437	17.0	102	17.0	216	
0500 6 C		6	4545	110	4 1/2"	5-ACSH	162	437	24.0	114	24.0	242	
0500 7 C		7	5050	125	5"	7-PCSH	187	437	30.0	127	30.0	267	
0500 8 C		8	5050	125	5"	7-PCSH	213	437	43.0	127	43.0	267	
0500 10 C		10	5050	125	5"	7-PCSH	264	437	68.5	127	68.5	267	
0530 3 C	530	3	3535	90	3 1/2"	4-ACLH	85	467	2.0	89	2.0	178	539.6
0530 4 C		4	4040	100	4"	5-ACSH	111	467	4.5	102	4.5	216	
0530 5 C		5	4545	110	4 1/2"	5-ACSH	136	467	11.0	114	11.0	242	
0530 6 C		6	5050	125	5"	5-ACSH	162	467	17.5	127	17.5	267	
0530 7 C		7	5050	125	5"	7-PCSH	187	467	30.0	127	30.0	267	
0530 8 C		8	5050	125	5"	7-PCSH	213	467	43.0	127	43.0	267	
0530 10 C		10	5050	125	5"	7-PCSH	264	467	68.5	127	68.5	267	





DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED



❖ FOR USE WITH 'C' & 'SPC' SECTION BELTS ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0560 3 C	560	3	3535	90	3 1/2"	5-ACSH	85	497	-	89	-	178	569.6
0560 4 C		4	4040	100	4"	5-ACSH	111	497	4.5	102	4.5	216	
0560 5 C		5	4545	110	4 1/2"	5-ACSH	136	497	11.0	114	11.0	242	
0560 6 C		6	5050	125	5"	5-ACSH	162	497	17.5	127	17.5	267	
0560 7 C		7	5050	125	5"	5-ACSH	187	497	30.0	127	30.0	267	
0560 8 C		8	5050	125	5"	5-ACSH	213	497	43.0	127	43.0	267	
0560 10 C		10	5050	125	5"	5-ACSH	264	497	68.5	127	68.5	267	
0600 3 C	600	3	4040	100	4"	8-PCLH	85	537	-	102	-	216	609.6
0600 4 C		4	4545	110	4 1/2"	4-ACLH	111	537	1.5	114	1.5	242	
0600 5 C		5	4545	110	4 1/2"	4-ACLH	136	537	4.5	114	4.5	242	
0600 6 C		6	5050	125	5"	5-ACSH	162	537	17.5	127	17.5	267	
0600 7 C		7	5050	125	5"	5-ACSH	187	537	30.0	127	30.0	267	
0600 8 C		8	5050	125	5"	5-ACSH	213	537	43.0	127	43.5	267	
0600 10 C		10	5050	125	5"	5-ACSH	264	537	68.5	127	68.5	267	
0630 3 C	630	3	4545	110	4 1/2"	4-ACLH	85	567	14.5	114	14.5	242	639.6
0630 4 C		4	4545	110	4 1/2"	4-ACLH	111	567	1.5	114	1.5	242	
0630 5 C		5	5050	125	5"	5-ACSH	136	567	4.5	127	4.5	267	
0630 6 C		6	5050	125	5"	5-ACSH	162	567	17.5	127	17.5	267	
0630 7 C		7	5050	125	5"	5-ACSH	187	567	30.0	127	30.0	267	
0630 8 C		8	5050	125	5"	5-ACSH	213	567	43.0	127	43.0	267	
0630 10 C		10	5050	125	5"	5-ACSH	264	567	68.5	127	68.5	267	
0710 3 C	710	3	4545	110	4 1/2"	4-ACLH	85	647	14.5	114	14.5	242	719.6
0710 4 C		4	4545	110	4 1/2"	4-ACLH	111	647	1.5	114	1.5	242	
0710 5 C		5	5050	125	5"	5-ACSH	136	647	4.5	127	4.5	267	
0710 6 C		6	5050	125	5"	5-ACSH	162	647	17.5	127	17.5	267	
0710 7 C		7	5050	125	5"	5-ACSH	187	647	30.0	127	30.0	267	
0710 8 C		8	5050	125	5"	5-ACSH	213	647	43.0	127	43.5	267	
0710 10 C		10	5050	125	5"	5-ACSH	264	647	68.5	127	68.5	267	
0762 3 C	762	3	4545	110	4 1/2"	4-ACLH	85	699	2.0	114	14.5	242	771.6
0762 4 C		4	4545	110	4 1/2"	4-ACLH	111	699	4.5	114	1.5	242	
0762 5 C		5	5050	125	5"	5-ACSH	136	699	17.0	127	4.5	267	
0762 6 C		6	5050	125	5"	5-ACSH	162	699	17.5	127	17.5	267	
0762 7 C		7	5050	125	5"	5-ACSH	187	699	30.0	127	30.0	267	
0762 8 C		8	5050	125	5"	5-ACSH	213	699	43.5	127	43.5	267	
0762 10 C		10	5050	125	5"	5-ACSH	264	699	68.5	127	68.5	267	
0800 3 C	800	3	5050	125	5"	4-ACLH	85	737	8.5	127	2.5	267	809.6
0800 4 C		4	5050	125	5"	4-ACLH	111	737	8.0	127	4.5	267	
0800 5 C		5	5050	125	5"	5-ACSH	136	737	4.5	127	17.0	267	
0800 6 C		6	5050	125	5"	5-ACSH	162	737	17.5	127	17.5	267	
0800 7 C		7	5050	125	5"	5-ACSH	187	737	30.0	127	30.0	267	
0800 8 C		8	5050	125	5"	5-ACSH	213	737	43.0	127	43.5	267	
0800 10 C		10	5050	125	5"	5-ACSH	264	737	68.5	127	68.5	267	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

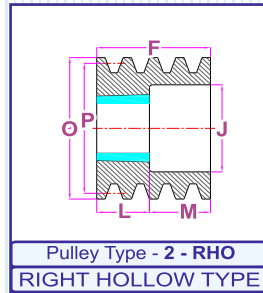



❖ FOR USE WITH 'C' & 'SPC' SECTION BELTS ❖

Pulley Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
0900 3 C	900	3	5050	125	5"	4-ACLH	85	837	8.5	127	8.5	267	909.6
0900 4 C		4	5050	125	5"	4-ACLH	111	837	8.0	127	8.0	267	
0900 5 C		5	5050	125	5"	5-ACSH	136	837	4.5	127	4.5	267	
0900 6 C		6	5050	125	5"	5-ACSH	162	837	17.5	127	17.5	267	
0900 7 C		7	5050	125	5"	5-ACSH	187	837	30.0	127	30.0	267	
0900 8 C		8	5050	125	5"	5-ACSH	213	837	43.0	127	43.0	267	
0900 10 C		10	5050	125	5"	5-ACSH	264	837	68.5	127	68.5	267	
1000 3 C	1000	3	5050	125	5"	4-ACLH	85	937	8.5	127	8.5	267	1009.6
1000 4 C		4	5050	125	5"	4-ACLH	111	937	8.0	127	8.0	267	
1000 5 C		5	5050	125	5"	5-ACSH	136	937	4.5	127	4.5	267	
1000 6 C		6	5050	125	5"	5-ACSH	162	937	17.5	127	17.5	267	
1000 7 C		7	5050	125	5"	5-ACSH	187	937	30.0	127	30.0	267	
1000 8 C		8	5050	125	5"	5-ACSH	213	937	43.0	127	43.0	267	
1000 10 C		10	5050	125	5"	5-ACSH	264	937	68.5	127	68.5	267	
1250 3 C	1250	3	5050	125	5"	4-ACLH	85	1187	5.5	127	8.5	267	1259.6
1250 4 C		4	5050	125	5"	4-ACLH	111	1187	8.0	127	8.0	267	
1250 5 C		5	5050	125	5"	5-ACSH	136	1187	4.5	127	4.5	267	
1250 6 C		6	5050	125	5"	5-ACSH	162	1187	17.5	127	17.5	267	
1250 7 C		7	5050	125	5"	5-ACSH	187	1187	30.0	127	30.0	267	
1250 8 C		8	5050	125	5"	5-ACSH	213	1187	43.0	127	43.0	267	
1250 10 C		10	5050	125	5"	5-ACSH	264	1187	68.5	127	68.5	267	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

METRIC STANDARD BORES AND KEYWAYS

Bore Dia	Keyway		Shallow Keyway Depth	Catalogue Code Group 029 ...																
	Width	Depth		1008 AO	1108 BO	1210 CO	1215 DO	1310 EO	1610 HO	1615 HO	2012 KO	2517 MO	2525 NO	3020 PO	3030 QO	3525 JO	3535 RO	4040 SO	4545 TO	5050 UO
9	3	1.4	-	...009	009															
10	3	1.4	-	...010	010															
11	4	1.8	-	...011	011	011	011													
12	4	1.8	-	...012	012	012	012													
14	5	2.3	-	...014	014	014	014	014	014	014	014									
16	5	2.3	-	...016	016	016	016	016	016	016	016	016								
18	6	2.8	-	...018	018	018	018	018	018	018	018	018	018							
19	6	2.8	-	...019	019	019	019	019	019	019	019	019	019	019						
20	6	2.8	-	...020	020	020	020	020	020	020	020	020	020	020						
22	6	2.8	-	...022	022	022	022	022	022	022	022	022	022	022						
24	8	3.3	1.3	...024"	024	024	024	024	024	024	024	024	024	024						
25	8	3.3	1.3	...025"	025	025	025	025	025	025	025	025	025	025	025					
28	8	3.3	1.3		028"	028	028	028	028	028	028	028	028	028	028					
30	8	3.3	-			030	030	030	030	030	030	030	030	030						
32	10	3.3	1.3			032"	032"	032	032	032	032	032	032	032						
35	10	3.3	1.3					035"	035	035	035	035	035	035	035	035	035			
38	10	3.3	-						038	038	038	038	038	038	038	038	038			
40	12	3.3	1.3						040	040	040	040	040	040	040	040	040	040		
42	12	3.3	1.3						042"	042"	042	042	042	042	042	042	042	042	042	
45	14	3.8	-							045	045	045	045	045	045	045	045	045		
48	14	3.8	-							048	048	048	048	048	048	048	048	048		
50	14	3.8	2.8							050"	050	050	050	050	050	050	050	050		
55	16	4.3	-								055	055	055	055	055	055	055	055	055	055
60	18	4.4	-								060	060	060	060	060	060	060	060	060	060
65	18	4.4	-									065	065	065	065	065	065	065	065	065
70	20	4.9	-									070	070	070	070	070	070	070	070	070
75	20	4.9	-									075	075	075	075	075	075	075	075	075
80	22	5.4	-										080	080	080	080	080	080	080	080
85	22	5.4	-										085	085	085	085	085	085	085	085
90	25	5.4	3.4										090"	090"	090	090	090	090	090	090
95	25	5.4	-												095	095	095	095	095	095
100	28	6.4	5.4													100"	100	100	100	100
105	28	6.4	-															105	105	105
110	28	6.4	-																110"	110
115	32	7.4	-																	115
120	32	7.4	-																	120
125	32	7.4	-																	125
Nominal dia at large end of Taper				35.0	38.0	47.5	47.5	51.0	57.0	57.0	70.0	85.5	85.5	108.0	108.0	127.0	127.0	146.0	162.0	177.5
Approx. Mass of Bush (Kg)				0.1	0.1	0.2	0.3	0.3	0.3	0.5	0.7	1.5	1.9	2.7	3.6	3.8	5.0	7.7	10.0	14.0




Dimensions in millimeters



IMPERIAL STANDARD BORES AND KEYWAYS

Bore Dia	Keyway		Shallow Keyway Depth	Catalogue Code Group 029 ...																
	Width	Depth		1008	1108	1210	1215	1310	1610	1615	2012	2517	2525	3020	3030	3525	3535	4040	4545	5050
0.375	0.125	0.060	-	0375	0375															
0.500	0.125	0.060	-	0500	0500	0500	0500	0500	0500	0500										
0.625	0.188	0.088	-	0625	0625	0625	0625	0625	0625	0625										
0.750	0.188	0.088	-	0750	0750	0750	0750	0750	0750	0750	0750	0750								
0.875	0.250	0.115	-	0875	0875	0875	0875	0875	0875	0875	0875	0875	0875							
1.000	0.250	0.115	0.052	1000*	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000					
1.125	0.312	0.112	0.064		1125*	1125	1125	1125	1125	1125	1125	1125	1125	1125	1125	1250	1250			
1.250	0.312	0.112	-			1250	1250	1250	1250	1250	1250	1250	1250	1250	1375	1375				
1.375	0.375	0.108	-					1375	1375	1375	1375	1375	1375	1500	1500	1500	1500			
1.500	0.375	0.108	-					1500	1500	1500	1500	1500	1500	1625	1625	1625	1625			
1.625	0.438	0.135	0.103					1625*	1625*	1625	1625	1625	1750	1750	1750	1750	1750	1750	1750	1750
1.750	0.438	0.135	-							1750	1750	1750	1875	1875	1875	1875	1875	1875	1875	1875
1.875	0.500	0.131	-							1875	1875	1875	2000	2000	2000	2000	2000	2000	2000	2000
2.000	0.500	0.131	-							2000	2000	2000	2125	2125	2125	2125	2125	2125	2125	2125
2.125	0.625	0.185	-										2125	2125	2250	2250	2250	2250	2250	2250
2.250	0.625	0.185	-										2250	2250	2375	2375	2375	2375	2375	2375
2.375	0.625	0.185	-										2375	2375	2500	2500	2500	2500	2500	2500
2.500	0.625	0.185	0.153										2500*	2500*	2625	2625	2625	2625	2625	2625
2.625	0.750	0.209	-												2750	2750	2750	2750	2750	2750
2.750	0.750	0.209	-												2875	2875	2875	2875	2875	2875
2.875	0.750	0.209	-												3000	3000	3000	3000	3000	3000
3.000	0.750	0.209	-														3125	3125	3125	3125
3.125	0.875	0.264	-														3125	3125	3125	3125
3.250	0.875	0.264	-														3250	3250	3250	3250
3.375	0.875	0.264	-														3375	3375	3375	3375
3.500	0.875	0.264	-														3500	3500	3500	3500
3.750	1.000	0.318	-															3750	3750	3750
4.000	1.000	0.318	-															4000	4000	4000
4.250	1.250	0.366	-																4250	4250
4.500	1.250	0.366	-																4500	4500
4.750	1.250	0.366	-																	4750
5.000	1.250	0.366	-																	5000
Nominal dia at large end of Taper (in mm)				35.0	38.0	47.5	47.5	51.0	57.0	57.0	70.0	85.5	85.5	108.0	108.0	127.0	127.0	146.0	162.0	177.5
Approx. mass of Bush (kg)				0.1	0.1	0.2	0.3	0.3	0.3	0.5	0.7	1.5	1.9	2.7	3.6	3.8	5.0	7.7	10.0	14.0



Dimensions in millimeters







Range of Engineering Products



Facility

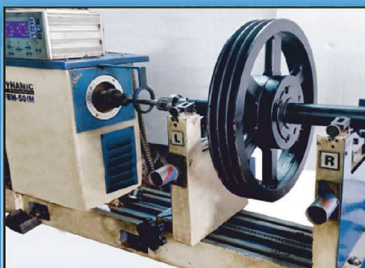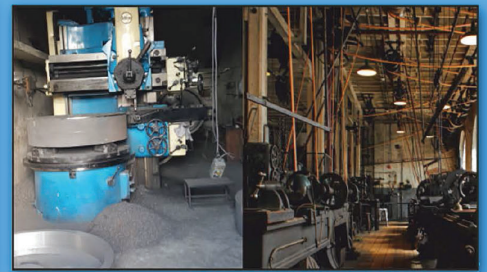

KHODIYAR INDUSTRIAL PVT. LTD.